
Shown In Printers Pairs Front & Back Up
Files Must Be Set Up As Separate Pages For Each Spread

Page 1 of 8
Front

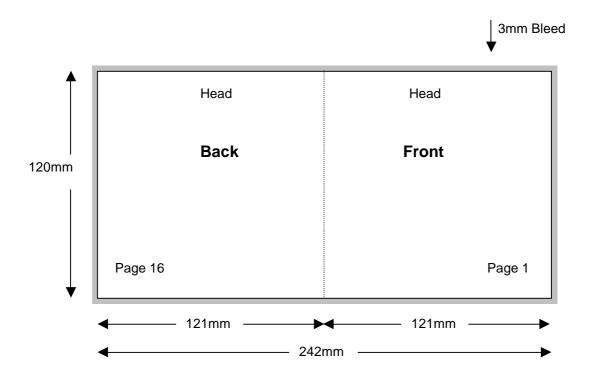

Specifications:


To be automatically packed, stock needs to be non-porous.

Allow 3mm Bleed all around. Trim & perforation marks to show 1mm into the bleed. Stock Coated A2 Art 130 gsm.

Catalogue number must appear on the final product.


Page 2 of 8

Backup

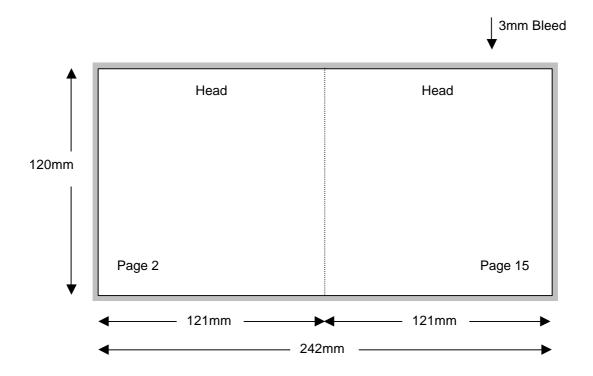


Page 3 of 8


Backup

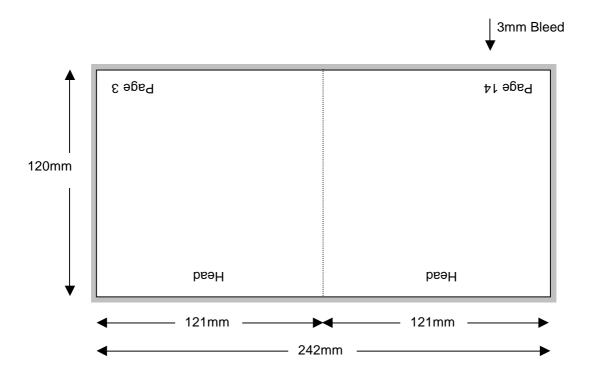

Page 4 of 8
Front

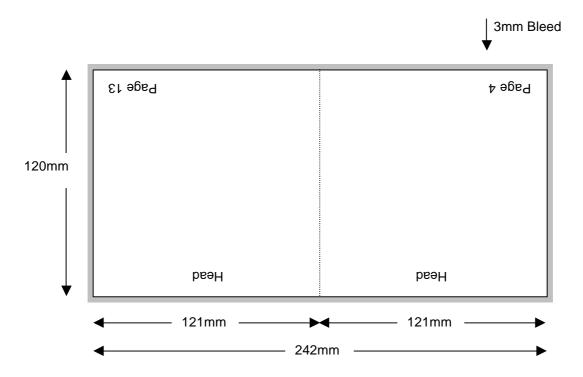


Page 5 of 8 Front

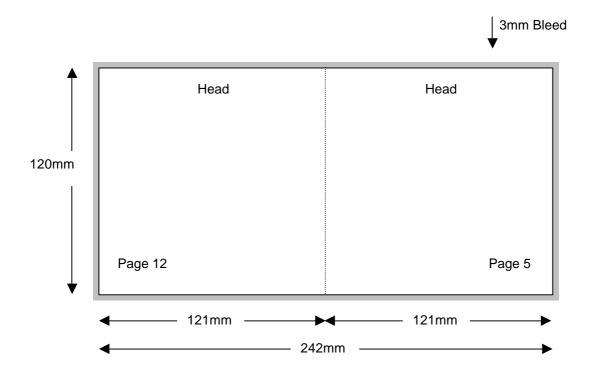


Page 6 of 8

Backup

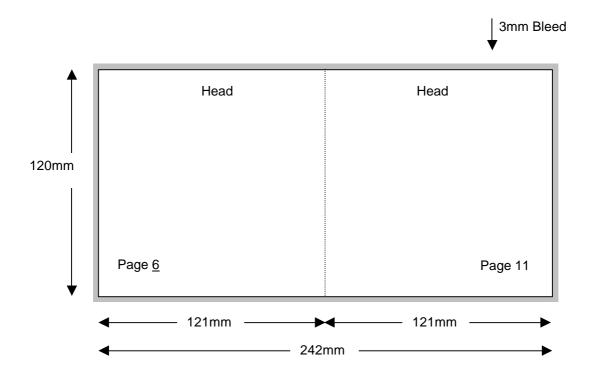

Page 7 of 8

Backup

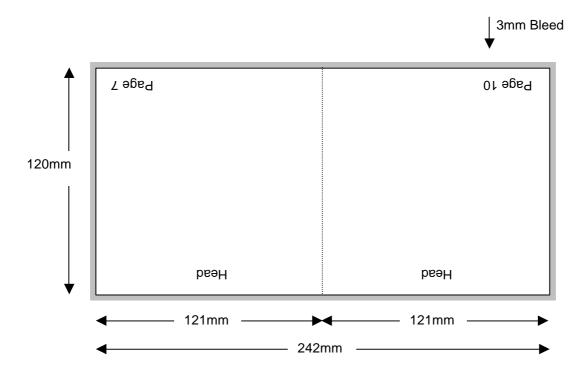

Page 8 of 8 Front

